


How to access AViPAS camera via IP (AV-1360):




For WINDOWS:

Connect the camera with your computer via Ethernet cable.

On the bottom-right corner of your desktop, right click on the Network icon, then click on the “Open Network and Sharing Center”.


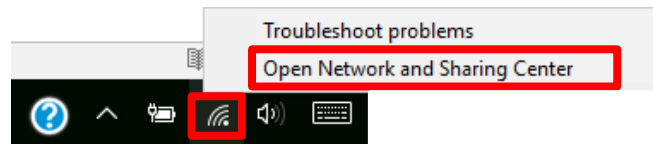


Click on “Ethernet2” -> “Properties” -> double click on “Internet Protocol Version 4(TCP/IPv4)”.

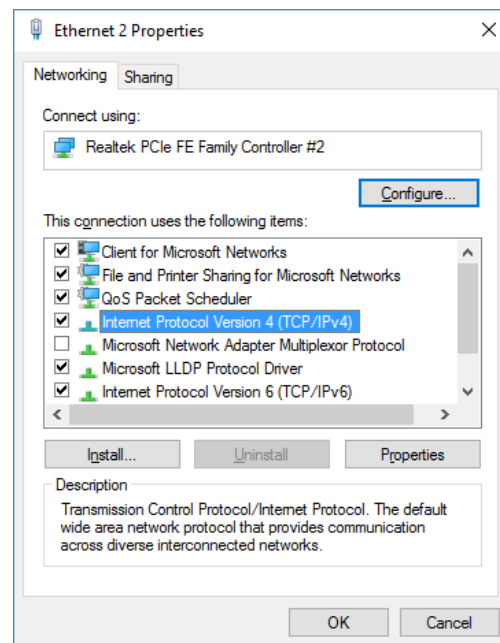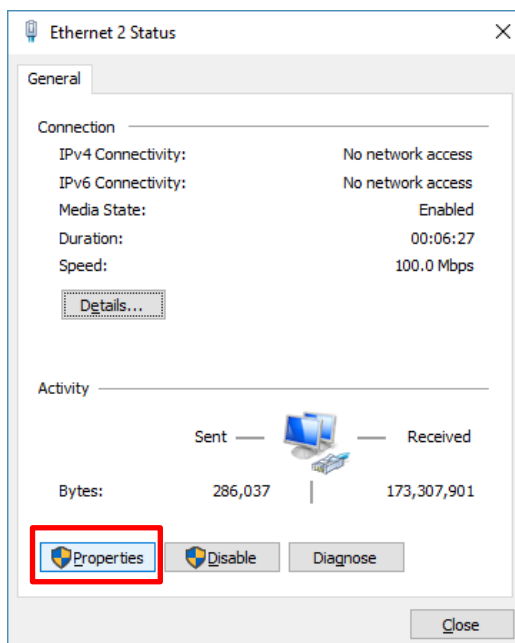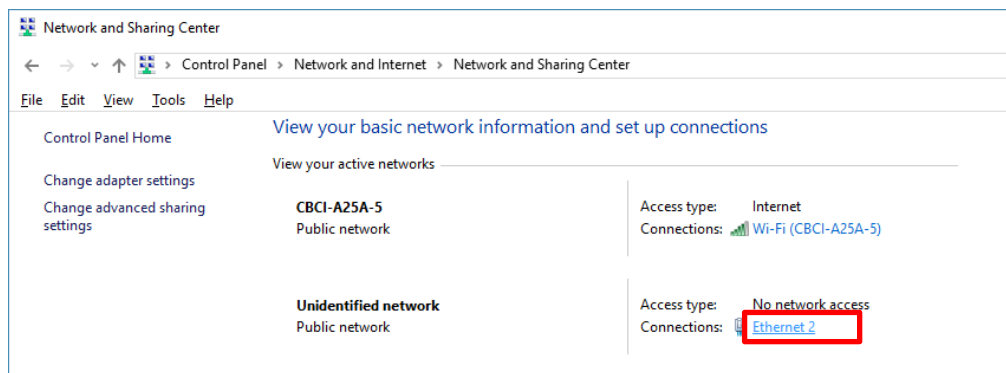

Choose “Use the following IP address”, change computer “IP address” (referred to as IP1) to be consistent with the camera IP address (referred to as IP2). For example, AV-1360 default IP address

(IP2): 192.168.100.88, thus the user can change the computer IP address (IP1) to 192.168.100.80. Make sure the first 3 sections are the same. Click on “OK”. In the warning window, click on “Yes”.

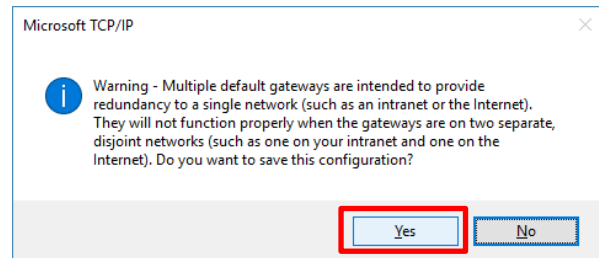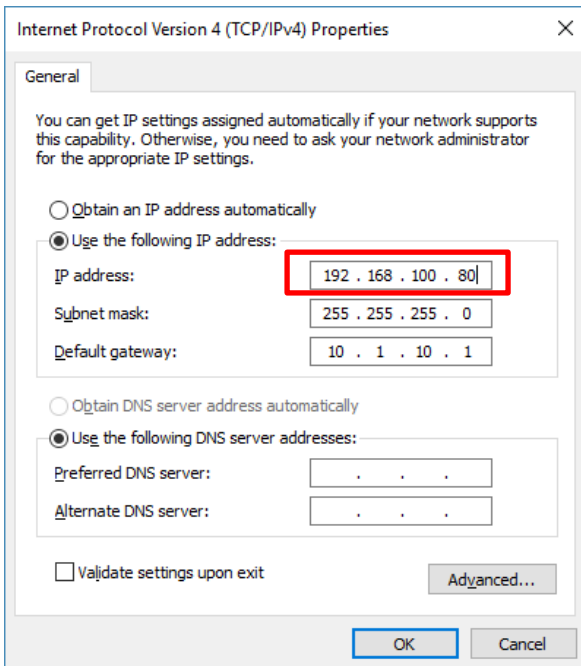


Open IE browser (IE browser works best with AV-1360, other browser might cause latency or incompatibility), input 192.168.100.88 in the address bar, log in with user name: admin, password: admin.

For MAC:

Connect the camera with your computer via Ethernet cable.

From the Apple menu, select System Preferences.

Select Network. The window shown below appears.

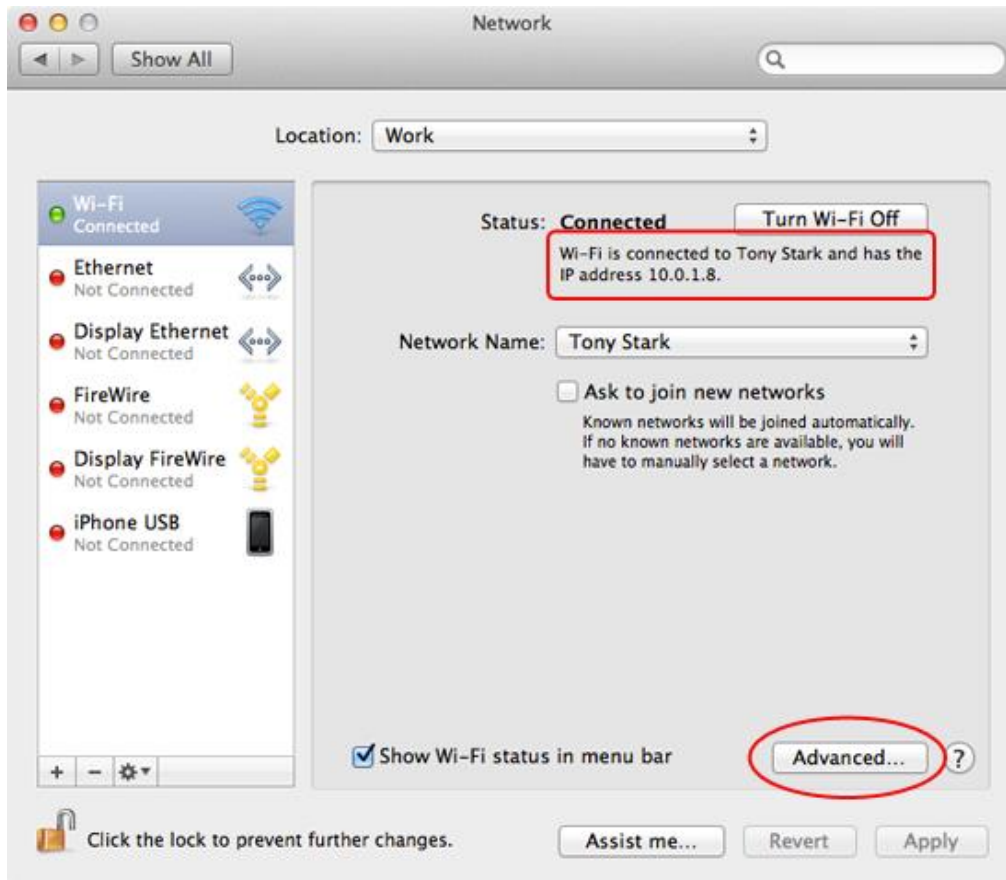


From the sidebar, select an active network interface. When the camera is connected to your Mac, both Wi-Fi and Ethernet options should be active.

Select **Wi-Fi** first, make a note of the current IP address assigned to your Mac. That's your **router's IP address** (referred to as **IP1**).

Then select **Ethernet**. Click **Advanced**.

Select **TCP/IP**. The window shown below appears.

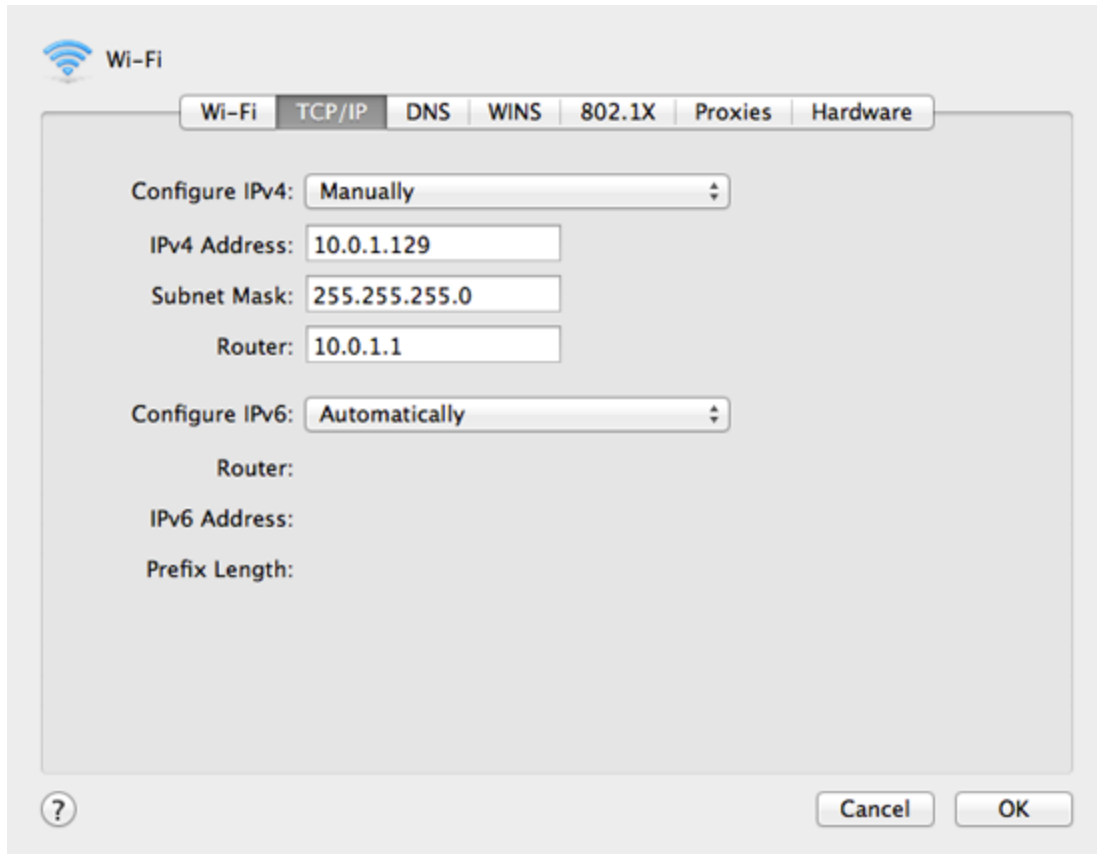

From the **Configure IPv4** menu, select **Manually**.

Change **IPv4 Address** (referred to as **IP2**) to be consistent with the **camera IP address** (referred to as **IP3**). For example, AV-1360 default IP address (IP3): 192.168.100.88, thus the user can change the computer IP address (IP2) to 192.168.100.80. Make sure the first 3 sections are the same. Click on “OK”, then “Apply”.